

### 5 WATTS

Part Number	Power		Frequency range (GHz)	V.S.W.R. (MAX)			Impedance ( $\Omega$ )	Type	Weight (g)	Fig.
	avg. (W)	peak (W)		DC-2	1-2	2-4				
R404 170 111	12	5000	DC-4	1.10	1.10	1.30	50 $\pm$ 5%	M	120	1
R404 175 111	12	5000	DC-4	1.10	1.10	1.30	50 $\pm$ 5%	F	115	2

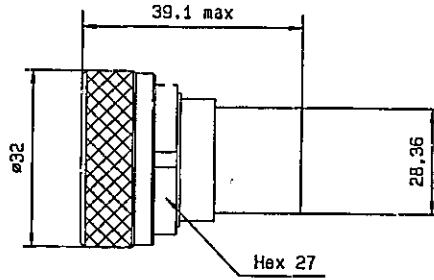
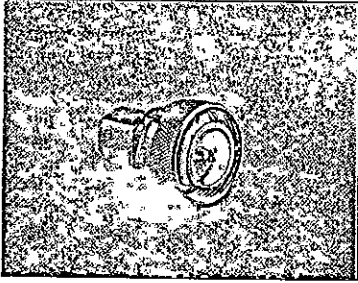


Fig. 1




Fig. 2

### 2 - 25 WATTS MEDIUM POWER

Part Number	Power		Frequency range (GHz)	V.S.W.R. (MAX)			Impedance ( $\Omega$ )	Type	Weight (g)	Fig.
	avg. (W)	peak (W)		DC-1	1-2	2-4				
R404 564 000	12	4000	DC-4	1.10	1.10	1.20	50 $\pm$ 5%	M	175	1
R404 564 500	12	4000	DC-4	1.10	1.10	1.20	50 $\pm$ 5%	F	165	2
R404 836 118	25	5000	DC-2	1.10	1.20		50 $\pm$ 5%	M	210	3
R404 837 118	25	5000	DC-2	1.10	1.20		50 $\pm$ 5%	F	205	4


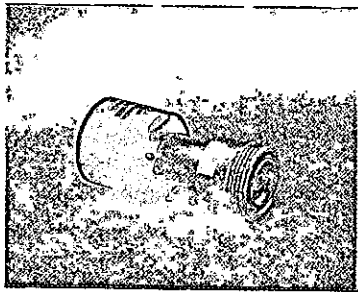


Fig. 1




Fig. 2

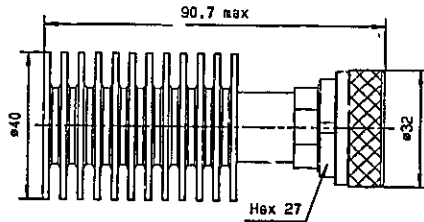
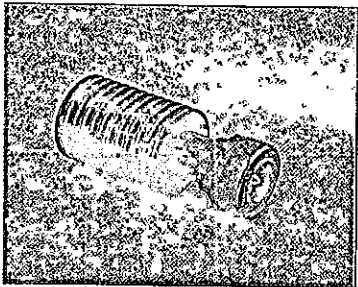


Fig. 3

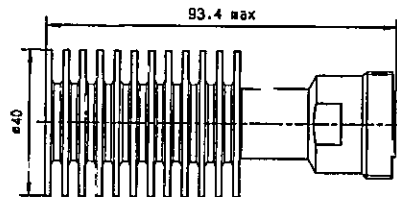


Fig. 4

Technical data sheet are available under the [www.radiall.com](http://www.radiall.com) Web site Select "Find a part number", enter the part number then "Search"