



# SPDT section

## SMT Power Micro-SPDT with 10 GHz capabilities - SLIM LINE series

See Page SPDT-2

## High performances SPDT up to 26.5 GHz - PLATINUM series

See Page SPDT-8

**NEW**

## SPDT up to 40 GHz

SPDT

QUICK ACCESS TO THE RIGHT PAGE

Example : **DC-18 GHz, SPDT with SMA connectors**

See page SPDT-14 for standard version ( R570 --- --- )

or see page SPDT-18 for low size version ( R572 --- --- )

	DIN1.6/5.6	SMB/SMC	BNC	QMA	N	TNC	SMA	SMA 2.9
DC - 2.5	SPDT-14							
DC - 3		SPDT-14 or 18	SPDT-22		SPDT-22	SPDT-22	SPDT-14 or 18	
DC - 6				SPDT-14 or 18				
DC - 12.4					SPDT-22	SPDT-22		
<b>DC - 18</b>						SPDT-22	<b>SPDT-14 or 18</b>	
DC - 26.5							SPDT-14 or 18	
DC - 40								SPDT-14 or 18

## SPDT Terminated up to 26.5 GHz

See DP3T Section page DP3T-1

## High performances terminated SPDT up to 26.5 GHz - PLATINUM series

See DP3T Section page DP3T-6

**NEW**

Technical data sheets are available on : [www.radiall.com](http://www.radiall.com)

For more technical information, consult us / E-mail : **USA** : [rfswitchusa@radiall.com](mailto:rfswitchusa@radiall.com) / **Rest of the world** : [switchingproducts@radiall.com](mailto:switchingproducts@radiall.com)



Australian Representatives - **ROJONE, PTY LTD.**

Tel: 02 9829 1555 E: [sales@rojone.com.au](mailto:sales@rojone.com.au) [www.rojone.com.au](http://www.rojone.com.au)



An innovative and original “micro-mechanical” design allows the R596 SMT micro-relay to bring together the excellent reliability, RF and repeatability characteristics of coaxial switches with the miniature size and low cost implementation of surface mount components. Very low return loss and insertion loss allow this relay to be used in power applications, as well as in typical SMT relay applications such as RF attenuators, RF matrices, spectrum analysers, and telecommunications.

### PART NUMBER SELECTION

**R 5 9 6 . . . . 0 .**



**Updated**

**Frequency range :** \_\_\_\_\_

- 3 : DC-3 GHz
- 8 : DC-8 GHz

**Type :** \_\_\_\_\_

- 1 : Failsafe
- 3 : Latching, 2 coils

**Actuator Voltage :** \_\_\_\_\_

- 2 : 12 Vdc (1)
- 3 : 24 Vdc


**Packaging style (2) :**

- 0 : Standard packaging
- 2 : Tape and reel of 200 relays (2)
- 5 : Tape and reel of 500 relays (2)
- 9 : Tape without reel (2)(4)
- T : Soldered on a connectorized test fixture (2)(3)


**Product range :**

- 0 : SPDT grade C
- 1 : SPDT grade M


- (1): For 12V failsafe model only : this relay can be used either with 6 Vdc or 12 Vdc actuator voltage, depending on the PC board connections (see schematics page **SPDT-3**)
- (2): Non standard packaging symbols (2, 5, or T) are not marked on the relay
- (3): See details about test fixture dimensions on page **SPDT-4**
- (4): Tape delivered without reel, available for all specific quantities up to 200 pcs

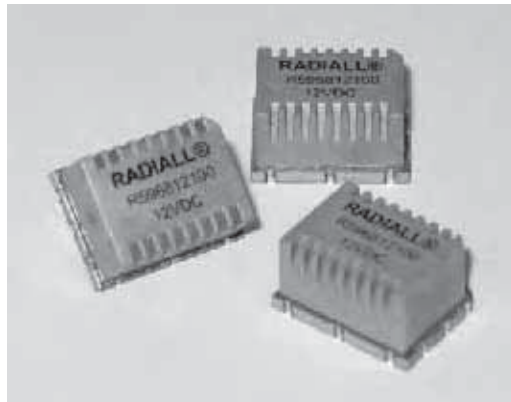

**TYPICAL OUTLINE DRAWING**

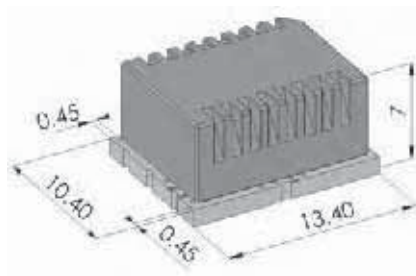

**ACTUAL SIZE**



**Patent pending**

Technical data sheets are available on : [www.radiall.com](http://www.radiall.com)

For more technical information, consult us / E-mail : [USA:rfswitchusa@radiall.com](mailto:USA:rfswitchusa@radiall.com) / Rest of the world : [switchingproducts@radiall.com](mailto:switchingproducts@radiall.com)




### GENERAL SPECIFICATIONS

Operating mode		Failsafe			Latching	
Nominal operating voltage (across temperature range)	Vdc	6 (1) (5.1 to 6.5)	12 (1) (10.2 to 13)	24 (20.5 to 30)	12 (10.2 to 13)	24 (20.5 to 30)
Coil resistance at 23°C (±10%)	Ω	82	330	1130	205	865
Operating current at 23°C	mA	73	36	25	58	32
RF and command ports		½ hole gold plated, infrared reflow, forced air oven or hand soldering (compatible with “lead-free” soldering processes)				
Switching time at nominal voltage	Making contacts Breaking contacts	Max 4 ms (typical 1.8 ms), including contact bounce time Max 1 ms (typical 0.5 ms)				
Switching time (max) at nominal voltage	ms	5 (typical 1.8 ms), including contact bounce time				
Life	Cold switching (max 120 cycles/min) Hot switching (max 20 cycles/min)	Grade M : 2 million cycles                      Grade C : 500.000 cycles 500.000 cycles (1W, impedance 50Ω, V.S.W.R. < 1.25)				
Construction		“LEAD FREE” construction – Waterproof (acc. To IEC 60529/IP67)				
Mass		< 2g				
Operating temperature range (with no icing condensation)	Grade M Grade C	-25°C to +85°C -20°C to +70°C			-40°C to +85°C -20°C to +70°C	
Storage temperature range		-55°C to +85°C				
Sine vibration (MIL STD 202, method 204D)		Cond. D : 10-2000 Hz, 20g Cond. G : 10-2000 Hz, 30g			operating non operating	
Random vibration (MIL STD 202, Method 214A, Profil I)		Cond. F : 50-2000 Hz, 20.71g (rms) Cond. H : 50-2000 Hz, 29.28g (rms)			operating non operating	
Shocks (According to MIL STD 202, Method 213B, Cond. C)		100g / 6 ms, ½ sine			operating	

(1) The same failsafe relay reference can be used either with 6 Vdc or 12 Vdc actuator voltage, depending on the PC board connections (see schematics below).

### PIN IDENTIFICATION


#### Schematics (Top view)

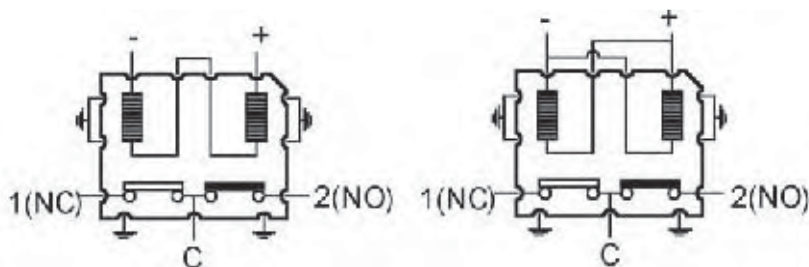

Failsafe model connection  
(12 Vdc or 24 Vdc)

Connection of a failsafe 12 Vdc model to be  
used with a 6 Vdc Power supply

Voltage	RF continuity
De-energized	C ↔ 1(NC)
Energized	C ↔ 2(NC)



Latching model connection  
(12 Vdc or 24 Vdc)

Voltage	RF continuity
-1 +1	C ↔ 1
-2 +2	C ↔ 2


Technical data sheets are available on : [www.radiall.com](http://www.radiall.com)

For more technical information, consult us / E-mail : **USA : [rfswitchusa@radiall.com](mailto:rfswitchusa@radiall.com) / Rest of the world : [switchingproducts@radiall.com](mailto:switchingproducts@radiall.com)**




### RF PERFORMANCES

Frequency Range GHz		V.S.W.R (max)	Insertion Loss (max) dB	Isolation (min) dB		Average power W		Third order Inter modulation	Impedance ohms
				switch alone	switch + board layout (1)	(2) cold switching	(3) hot switching		
DC – 3 DC – 8	DC – 1	1.10	0.10	50	50	120	50	- 120 dBc typical (2 carriers 20W)	50
	1 – 2	1.20	0.20	45	40	70	50		
	2 – 3	1.35	0.30	40	30	40	40		
	3 – 6	1.35	0.40	35	30	25	25		
	6 – 8	1.40	0.80	30	30	5	5		

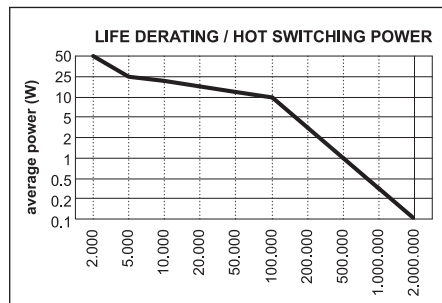


(2) Cold switching, without cooling fan  
Latching models : no derating from -40°C to +85°C  
Failsafe models : see power derating curve


(3) For hot switching use only :  
see RF contact life derating  
curve (impedance 50Ω, V.S.W.R.  
<1.25, 30 cycles/mn)

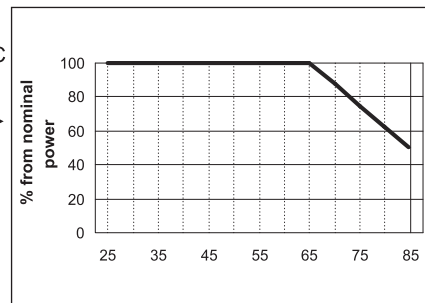

### TYPICAL PERFORMANCES

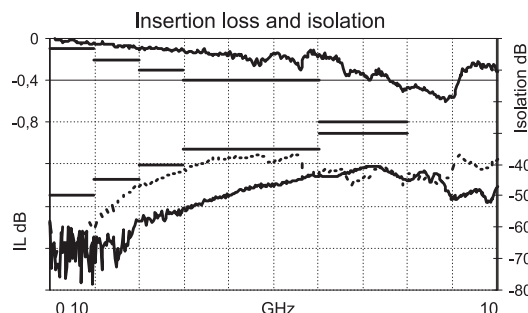


(1) Taking account of the reduction of isolation due to coupling between PCB microstrip lines (see isolation dotted curve above and measurement method below)


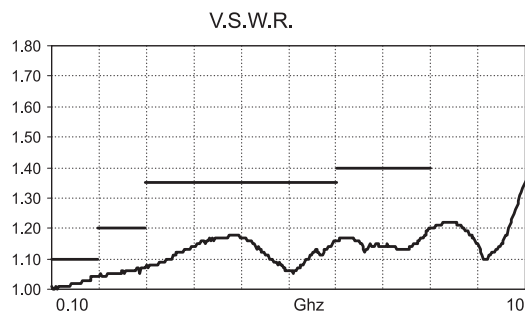


### Measurement method

Calibration board



Test Fixture (4)



Inputs/Outputs of the calibration board and test fixture are equipped with SMA type receptacle connectors, **RADIALL** part number R125 510 000. The insertion loss of the relay itself is calculated by subtracting the insertion loss of the calibration board to the insertion loss of the relay welded on the final board layout in accordance with the recommended implementation shown above (see dimension details on following pages).

(4) Test Fixture available. To order, please use the suffix «T» (part number R596 --- T), as explained in page **SPDT-2**.

Technical data sheets are available on : [www.radiall.com](http://www.radiall.com)

For more technical information, consult us / E-mail : **USA** : [rfswitchusa@radiall.com](mailto:rfswitchusa@radiall.com) / **Rest of the world** : [switchingproducts@radiall.com](mailto:switchingproducts@radiall.com)



### RELAY PACKAGING



ACCORDING TO IEC 286-3 STANDARD

#### MATERIALS


Reel : polyester

Carrier tape : antistatic PETG (polyester)


Cover tape : polyester

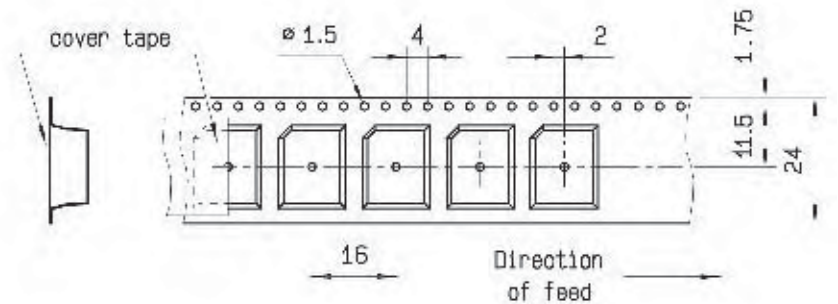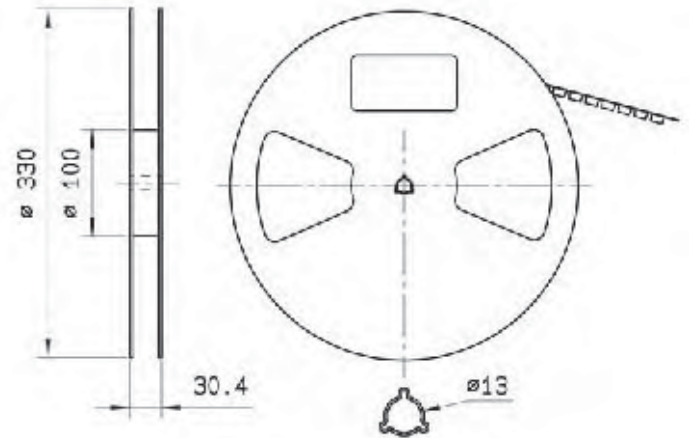

Video shadow of the relay

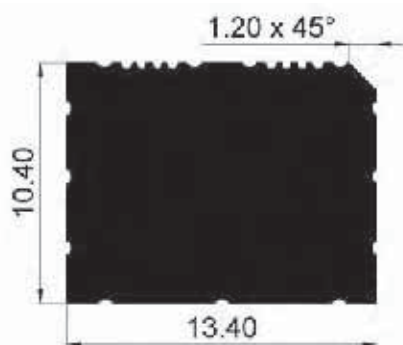

Aspiration area

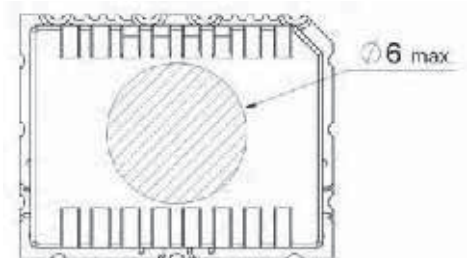

Technical data sheets are available on : [www.radiall.com](http://www.radiall.com)


For more technical information, consult us / E-mail : USA : [rfswitchusa@radiall.com](mailto:rfswitchusa@radiall.com) / Rest of the world : [switchingproducts@radiall.com](mailto:switchingproducts@radiall.com)



## PC BOARD MOUNTING

## Board layout

DXF or GERBER format file  
available upon request (1)

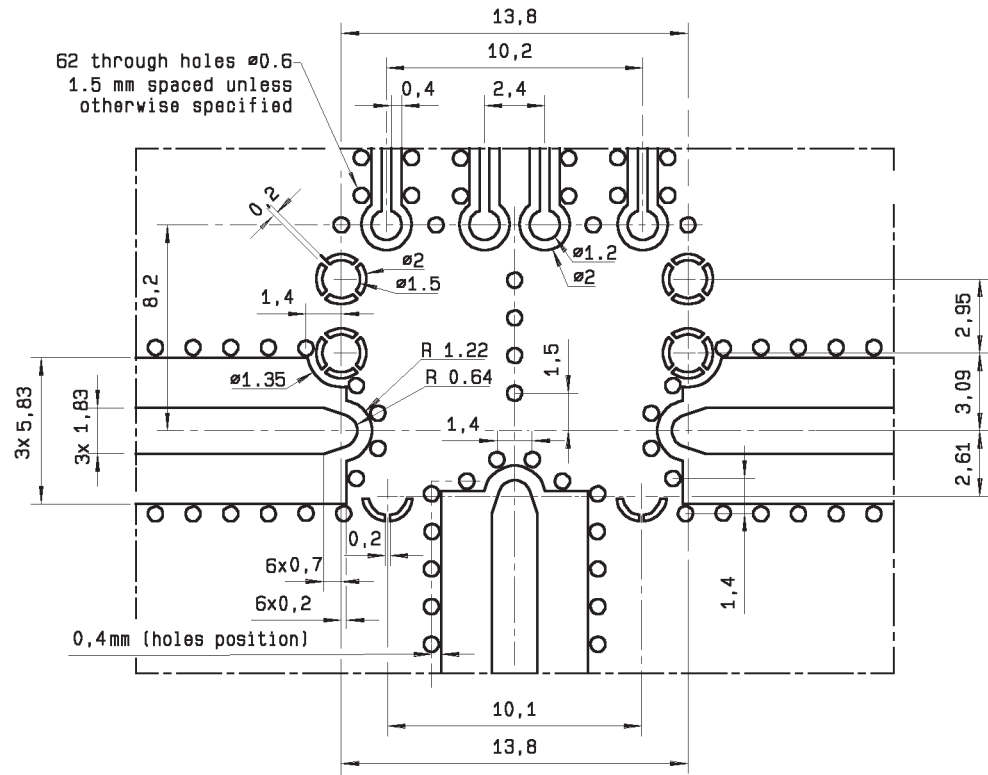

## Substrate Types

Recommended substrates are **ROGERS RO4003** or **ARLON 25N**,


- Mounting face :** Thickness 0.813 mm Cu double side 17.5µm. Width of track 1.83 mm  
Others substrates : **RO4350**, thickness 0.813 mm Cu double side 17.5µm. Width of track 1.80 mm  
**25FR**, thickness 0.813 mm Cu double side 17.5µm. Width of track 1.76 mm
- Opposite face :** Plating all over the face.

**Total thickness of the tracks (copper over thickness + plating) : 40µm.**

Other substrates may be used (for instance standard FR4), if provided with adequate modification of the tracks width.

## Relay soldering pattern

DXF format file available upon request

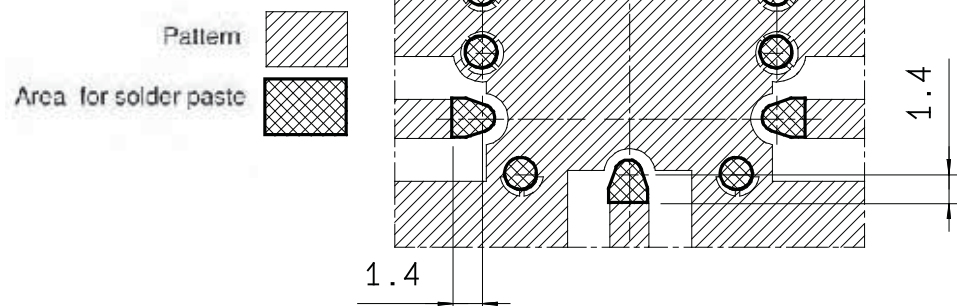

(1) Please contact us by E-Mail : [switchingproducts@radiall.com](mailto:switchingproducts@radiall.com)

Technical data sheets are available on : **[www.radiall.com](http://www.radiall.com)**

For more technical information, consult us / E-mail : **USA : [rfswitchusa@radiall.com](mailto:rfswitchusa@radiall.com) / Rest of the world : [switchingproducts@radiall.com](mailto:switchingproducts@radiall.com)**





### RECOMMENDED SMT SOLDERING PROCEDURES

#### A - Soldering procedure using automatic pick and place equipment

##### 1-Solder paste :

R596 series are "Lead Free", and Lead Free Sn-Ag3.5-Cu0.7 solder cream may be used as well as standard Sn63-Pb35-Ag2. **RADIALL** recommends using a "no clean - low residue" solder cream (5 % solid residue of flux quantity) that will permit the elimination of the cleaning operation step after soldering.

Note : Due to the gold plating of the switch PCB interface, it is important to use a paste made with silver. This will help in avoiding formation of intermetallics as part of the solder joint.

##### 2-Solder paste deposition :

Solder cream may be applied on the board with screen printing or dispenser technologies. For either method, the solder paste must be coated to appropriate thickness and shapes to achieve good solder wetting. Please optically verify that the edges of the zone are clean and without contaminates, and that the PCB zoned areas have not oxydated. The design of the mounting pads and the stenciling area are given on page 5, for a thickness of the silk-screen printing of 0.15 mm (0.006").

##### 3-Placement of the component :


For small lightweight components such as chip components, a self-alignment effect can be expected if small placement errors exist. However, this effect is not as expected for relays components and they require a accurate positioning on their soldering pads, typically +/- 0.1mm (+/-0.004").

Place the relay onto the PCB with automatic pick and place equipment. Various types of suction can be used.

**RADIALL** does not recommend using adhesive agents on the component or on the PCB.

##### 4-Soldering : infra-red process

Please follow the **RADIALL** recommended temperature profile for infra-red reflow or forced air convection :

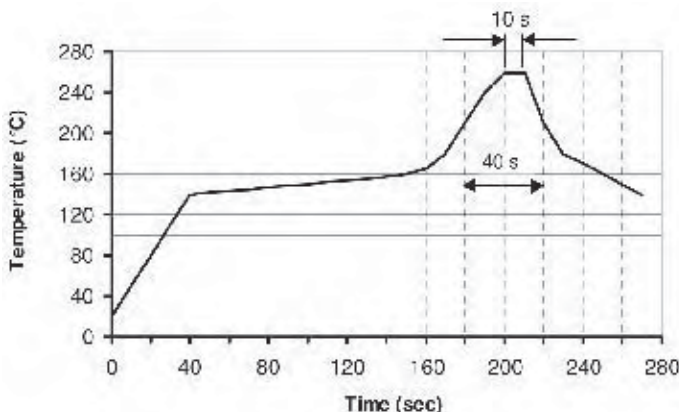

**CAUTION :** higher temperature (>260°C) and longer process duration would damage permanently the switches.

##### 5-Cleaning procedure :

On miniature relays, high frequency cleaning may cause the contacts to stick. If cleaning is needed, please avoid ultrasonic cleaning and use alcohol based cleaning solutions.

##### 6-Quality check :

Verify by visual inspection that the component is centered on the mounting pads.

Solder joints : verify by visual inspection that the formation of meniscus on the pads are proper, and have a capillarity amount upper the third of the height.

#### B - Soldering procedure by manual operation

##### 1-Solder paste and flux deposition :

Refer to procedure A-1

Deposite a thin layer of flux on mounting zone.

Allow the flux to evaporate a few seconds before applying the solder paste, in order to avoid dilution of the paste.

##### 2-Solder paste deposition :

**RADIALL** recommends depositing a small amount of solder paste on the mounting zone area by syringe.

Be careful, not to apply solder paste outside of the zone area.

##### 3-Placement of the component :

During manipulation, avoid contaminating the lead surfaces by contact with fingers.

Place the component on the mounting zone by pressing on the top of the relay lid.

##### 4-Hand soldering :

Iron wattage 30 to 60 W.

Tip temperature 280 to 300°C for max. 5 seconds

To keep good RF characteristics above 3GHz, it is important to solder RF ports first, and apply pressure on the relay lid during all the soldering stage, so as to reduce the air gap between the PC board and the relay.

##### 5-Cleaning procedure :

On miniature relays, high frequency cleaning may cause the contacts to stick. If cleaning is needed, please avoid ultrasonic cleaning and use alcohol based cleaning solutions.

##### 6-Quality check :

Verify by visual inspection that component is centred on the mounting pads.

Solder joints : verify by visual inspection that the formation of meniscus on the RF pads are proper, and have a capillarity amount higher than one third of the height.

Technical data sheets are available on : [www.radiall.com](http://www.radiall.com)

For more technical information, consult us / E-mail : **USA :** [rfswitchusa@radiall.com](mailto:rfswitchusa@radiall.com) / **Rest of the world :** [switchingproducts@radiall.com](mailto:switchingproducts@radiall.com)



Australian Representatives - **ROJONE, PTY LTD.**

Tel: 02 9829 1555 E: [sales@rojone.com.au](mailto:sales@rojone.com.au) [www.rojone.com.au](http://www.rojone.com.au)

SPDT - 7