

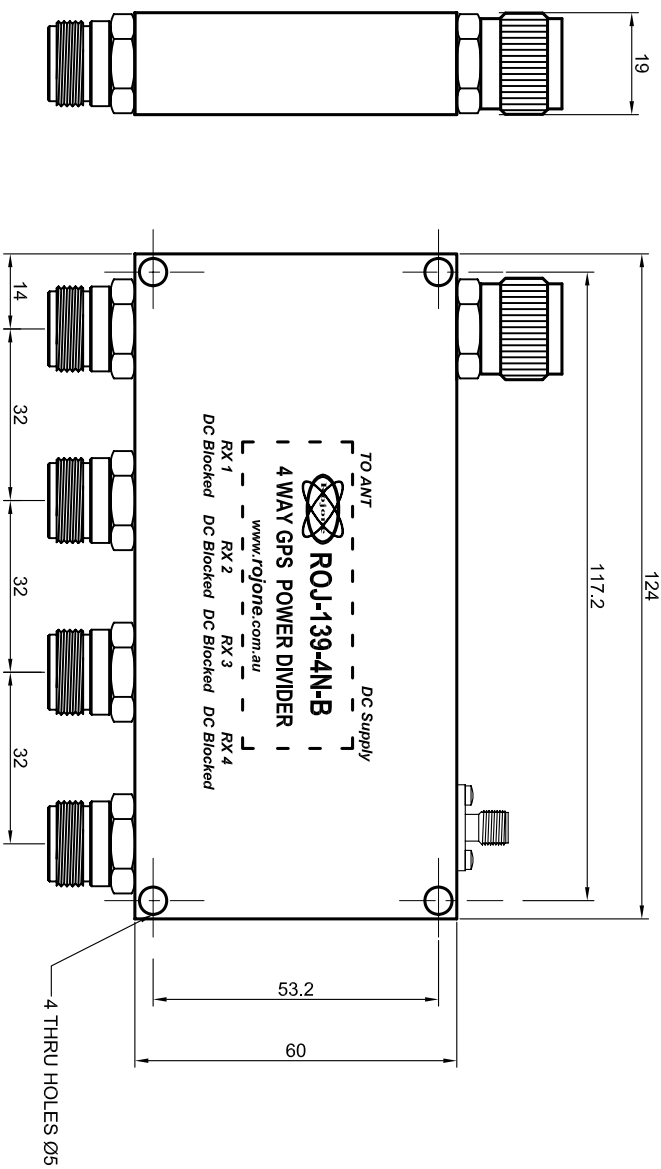



1	2	3	4	5	6	7	8	9	10	11	12
REVISONS		3rd ANGLE PROJECTION	THIS DOCUMENT AND THE DESIGN SHOWN THEREON IS THE PROPERTY OF ROJONE PTY LTD AND MUST NOT BE SOLD, LENT, GIVEN AWAY, COPIED, REPRODUCED OR OTHERWISE DIVULGED TO ANY THIRD PARTY OR USED FOR MANUFACTURE. DO NOT SCALE								
A	ISSI ZONE	DESCRIPTION PER REQUEST/DATE									
b	ADD SPEC AND PART NUMBER										
c	N-M for input, Add sma, bigger box										

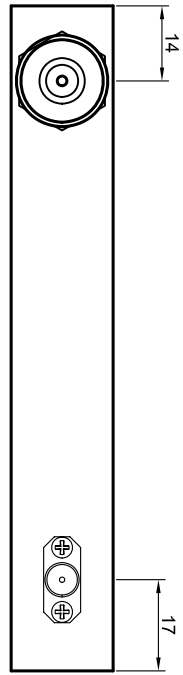

### Specification

- Frequency: 1100-1600 MHz
- Input VSWR: < 1.5 : 1
- Through Gain: 0 dB ±1 dB
- Power Supply: 200mA@8-20V
- DC Supply to Ant: 3V3 or 5V@100mA
- Output Isolation: > 20 dB
- Output DC Load: 220R for RX 1, 2, 3 & 4
- Op Temperature: -40 to +65 °C
- Humidity: 100 %
- RF Connector: N - M Input
- N - F Output

TO ANT  
  
**ROJ-139-4N-B**  
 4 WAY GPS POWER DIVIDER  
 www.rojone.com.au  
 RX 1 DC Blocked  
 RX 2 DC Blocked  
 RX 3 DC Blocked  
 RX 4 DC Blocked



ROJONE PTY LTD ACN 002891241  
 81 AERO RD INGLEBURN 2965  
 SUDBURY VIC 3218  
 Tel: (012) 9829 1555 Fax: (012) 9805 8812  
 Web: www.rojone.com.au E-mail: sales@rojone.com.au

TITLE  
 4 WAY GPS DIVIDER ROJ-139-4N-B  
 INTERFACE DRAWING

MATERIAL	AS PART	DRAWN	Y. GU	DWG No:	002004250113
FINISH	AS PART	CHECKED	H. JIA	SCALE	1:1
		APPROVED	B. G.	SHEET	1 OF 1
				FILENAME	002004250113ISSC.DWG
				A3	

UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES (mm) TOLERANCE: LINEAR ±0.1 ANGULAR ±1° REMOVE ALL BURRS AND SHARP EDGES