


ISSI	ZONE	DESCRIPTION	PER REQUEST	DATE




3<sup>rd</sup> ANGLE PROJECTION  
 THIS DOCUMENT AND THE DESIGN SHOWN THEREON IS THE PROPERTY OF ROJONE PTY LTD AND MUST NOT BE SOLD, LENT, GIVEN AWAY, COPIED, REPRODUCED OR OTHERWISE DIVULGED TO ANY THIRD PARTY OR USED FOR MANUFACTURE.  
 OR ANY OTHER PURPOSE WITHOUT DIRECT WRITTEN PERMISSION OF ROJONE PTY LTD.

218



**SPECIFICATIONS**  
**AMA-2255-3-716-HP**  
 (As Combiner)

Frequency Range: 800-2500MHz  
 Input RF Power: 100W Per Port Max as Combiner  
 I/O Return Loss: -20dB Typ  
 Amp Balance:  $\pm 0.5$ dB  
 IM3: -150dBc@43dBmX2  
 Thru Loss: 5dB Typ  
 Op Temperature: -40 to +65 °C  
 Humidity: 100%  
 Connector: Din 716 Female  
 Termination Connector: N-F  
 Weight: 1.5 Kg (Aluminium body)

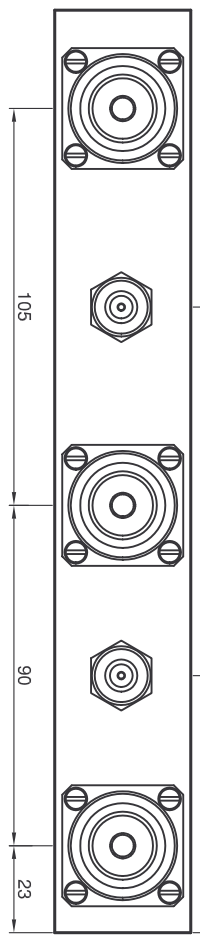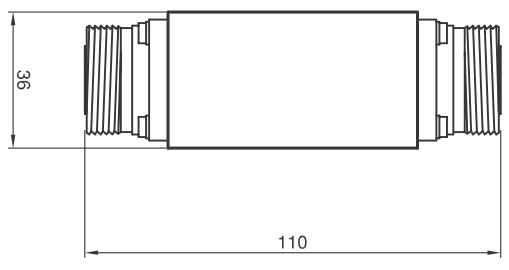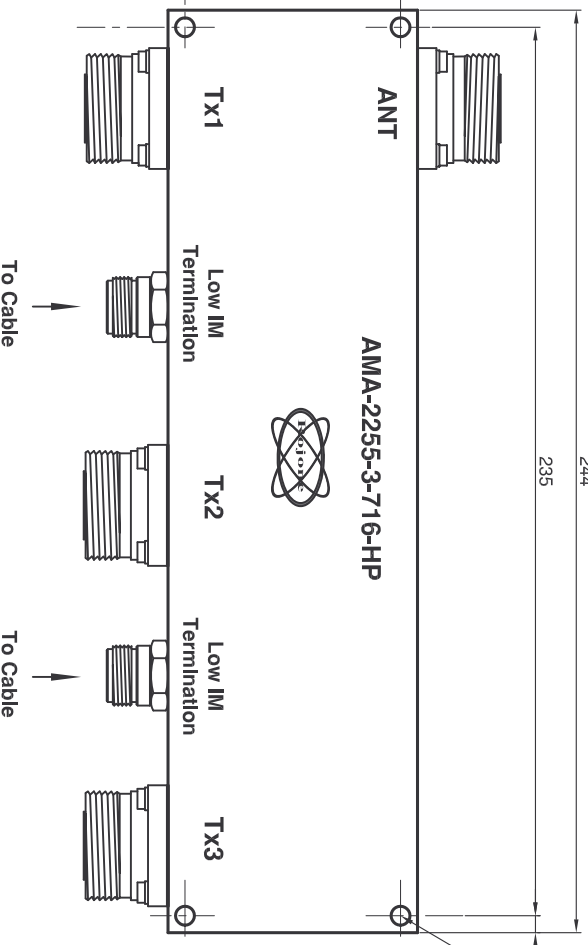

ROJONE PTY LTD ACN 002691241  
 81 ASHO RD INGLEBURN 2565  
 STONEYC, AUSTRALIA  
 Ph: (612) 9829 1555 Fax: (612) 9605 8812  
 Web: www.rojone.com.au E-mail: sales@rojone.com.au

**TITLE**  
 INTERFACE DRAWING FOR DIN TYPE  
 WAY COMBINER AMA-2255-3-716-HP

DRWG No: 002003250032

MATERIAL	ALUMINIUM ALLOY 6061 BODY	CHECKED	H. JIA	SCALE	1:1	SHEET	1 OF 1
FINISH	COPPER PLATE 3 TO 5 MICRONS HIGH PURITY SILVER PLATE 10 TO 12 MICRONS	APPROVED	H. JIA	FILENAME	002003250032/SSA.DWG	A2	

UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES (mm)  
 TOLERANCE: LINEAR ±0.1 ANGULAR ±1° REMOVE ALL BURRS AND SHARP EDGES