3rd ANGLE PROJECTION

THIS DOCUMENT AND THE DESIGN SHOWN THEREON IS THE PROPERTY OF ROJONE PTY LTD AND MUST NOT BE SOLD, LENT,GIVEN AWAY, COPIED, REPRODUCED OR OTHERWISE DIVULGED TO ANY THIRD PARTY OR USED FOR MANUFACTURE, OR ANY OTHER PURPOSE WITHOUT DIRECT WRITTEN PERMISSION OF ROJONE PTY LTD.

DO NOT SCALE

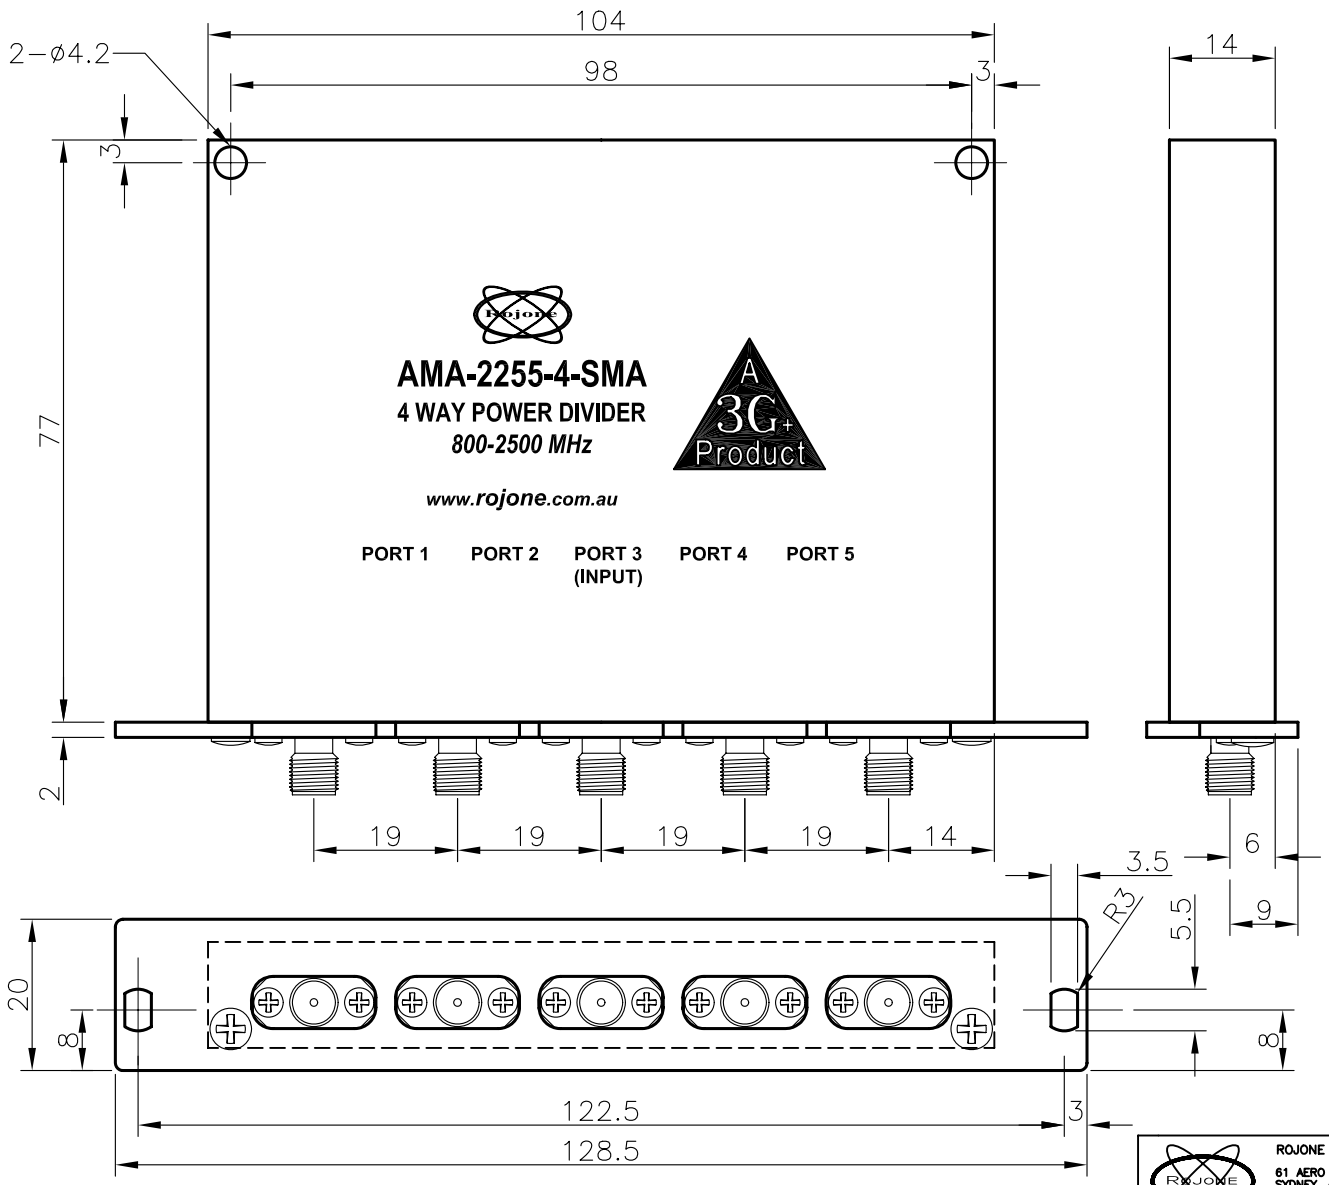

SPECIFICATION for AMA-2255-4-SMA	
Frequency:	800-2500MHz
Number of Ports:	4 Ports
Isolation:	20dB Min
Throu Loss:	7 dB Typ
Amplitude Balance:	< ±0.2 dB
Phase Balance:	< ±2 Degrees
Return Loss:	-20dB Typ
Max RF Power:	30 Watts CW
Max. Output Mismatch:	VSWR 5:1
Impedance:	50 Ohms
Connector Type:	SMA - FEMALE
Size:	104mm x 77mm x 14mm PLUS CONNECTORS

REVISION	DATE	CHECKED
A	27-08-2008	H. JIA
B	12-09-2008	H. JIA
C	12-09-2008	H. JIA
D	15-09-2008	H. JIA

ROJONE PTY LTD ACN 002691241
61 AERO RD INGLEBURN 2560
SYDNEY, AUSTRALIA
Ph: (612) 9829 1555 Fax: (612) 9605 8812
Web: www.rojone.com.au E-mail: sales@rojone.com.au

TITLE	INTERFACE DRAWING FOR AMA-2255-4-SMA
DRWG No:	002004250107
MATERIAL	AS PART
FINISH	AS PART
DRAWN	Y. GU
CHECKED	H. JIA
APPROVED	B. G.
SCALE	1:1
SHEET	1 OF 1
FILENAME	002004250107ISSD.DWG
	A4

UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES (mm) | TOLERANCE: LINEAR ±0.1 ANGULAR ±1° | REMOVE ALL BURRS AND SHARP EDGES