


1	2	3	4	5	6	7	8	9	10	11	12
REVISONS		3rd ANGLE PROJECTION	THIS DOCUMENT AND THE DESIGN SHOWN THEREON IS THE PROPERTY OF ROJONE PTY LTD AND MUST NOT BE SOLD, LENT, GIVEN AWAY, COPIED, REPRODUCED OR OTHERWISE DIVULGED TO ANY THIRD PARTY OR USED FOR MANUFACTURE. DO NOT SCALE								
ISSI ZONE	DESCRIPTION PER REQUEST/DATE										

102.5

19




205
198




Input

AMA-2255-SL-8N
8 Way Power Divider
800-2500MHZ
www.rojone.com.au
 Output 1, 2, 3, 4, 5, 6, 7, & 8

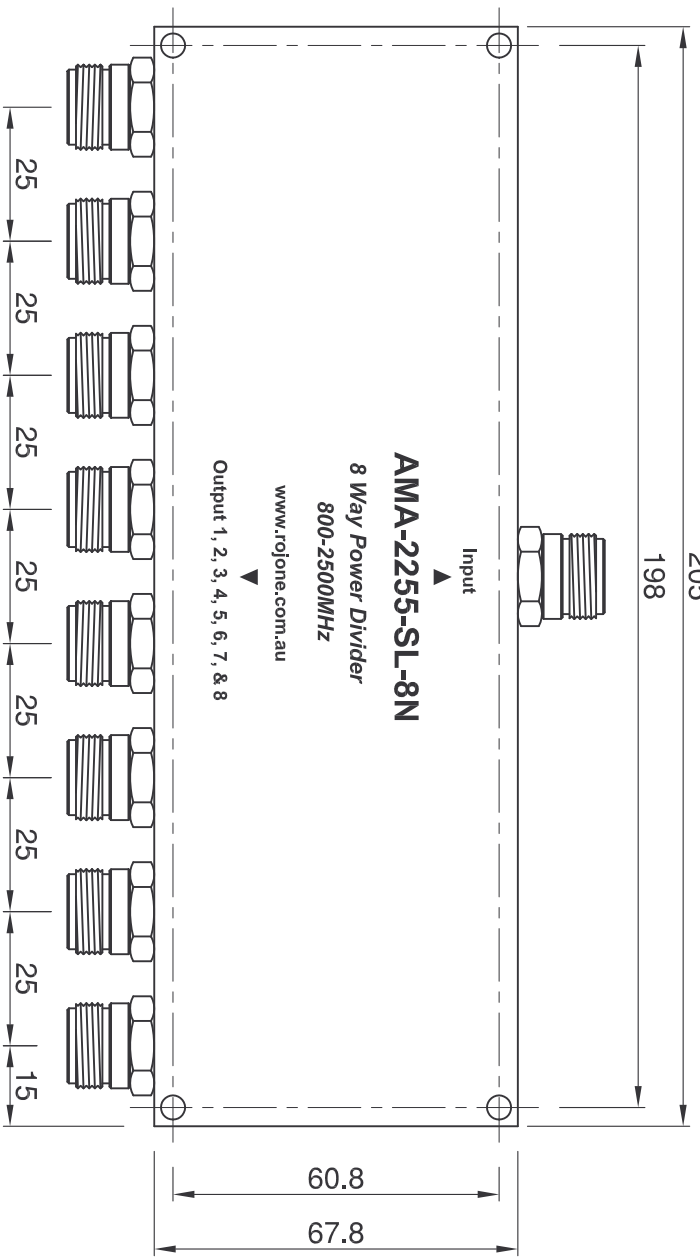

SPEC for AMA-2255-SL-8N

Op Freq Range:	800 to 2500MHZ
Rtn Loss-All Ports:	< -20dB
Thru Loss:	9.3dB Typ
Phase Balance:	< 5°
Amplitude Balance:	< ± 0.2 dB
Max Input RF Power:	10W
Isolation:	> 25dB
RF Connectors:	N-F 50 Ohm



ROJONE PTY LTD ACN 002891241
 81 AERO RD INGLEBURN 2565
 SUDBURY, AUSTRALIA
 Tel: (012) 9829 1555 Fax: (012) 9805 8812
 Web: www.rojone.com.au E-mail: sales@rojone.com.au

TITLE
**INTERFACE DRAWING FOR
 AMA-2255-SL-8N 800-2500MHZ**

UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES (mm) TOLERANCE: LINEAR ±0.1 ANGULAR ±1° REMOVE ALL BURRS AND SHARP EDGES

MATERIAL	ALUMINIUM ALLOY MAIN BODY	FINISH	PAINT
DRAWN	Y. GU	CHECKED	H. JIA
APPROVED	B. G.	FILENAME	002008250034ISSA.DWG
SCALE	1:1	SHEET	1 OF 1
DRWG No:	002008250034		

A3