


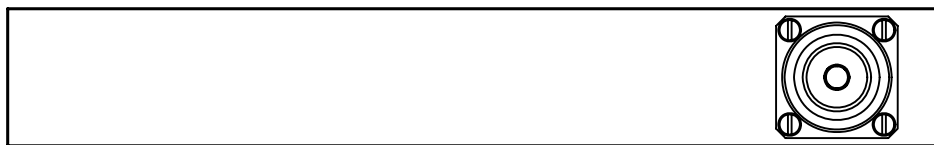
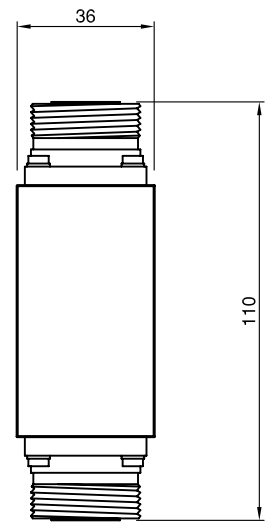
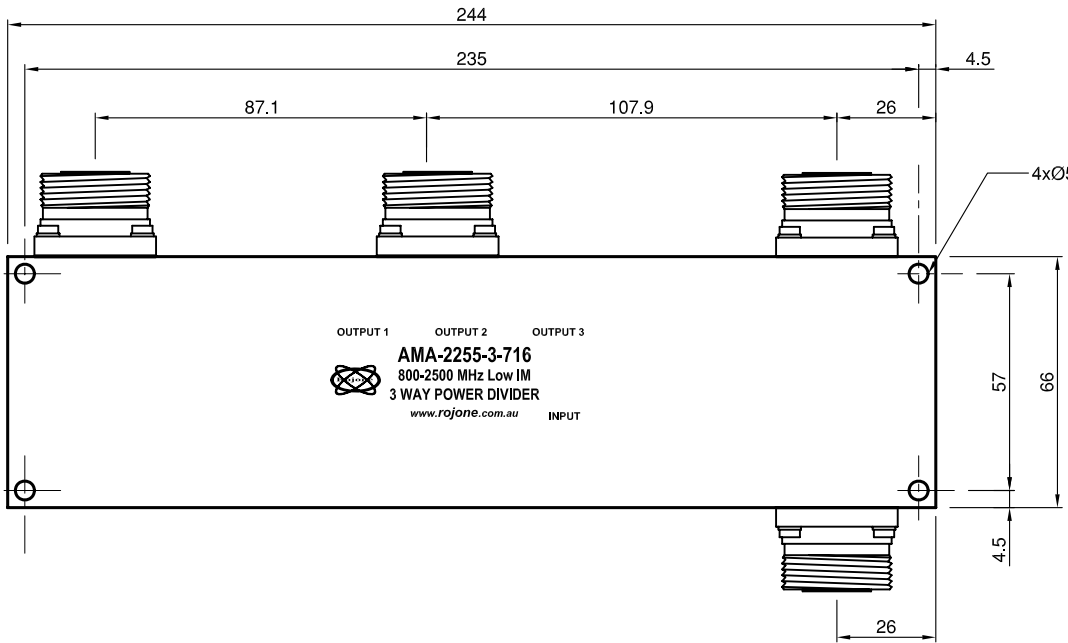
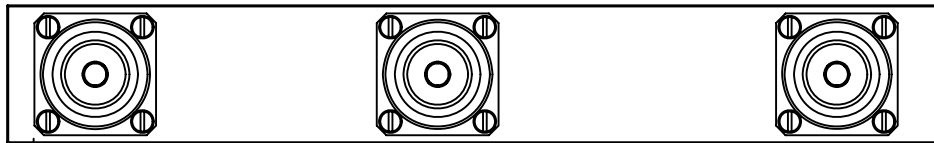
REVISIONS			
ISS	ZONE	DESCRIPTION/PER REQUEST/DATE	
B		Add spec	


3rd ANGLE PROJECTION  THIS DOCUMENT AND THE DESIGN SHOWN THEREON IS THE PROPERTY OF ROJONE PTY LTD AND MUST NOT BE SOLD, LENT, GIVEN AWAY, COPIED, REPRODUCED OR OTHERWISE DIVULGED TO ANY THIRD PARTY OR USED FOR MANUFACTURE, OR ANY OTHER PURPOSE WITHOUT DIRECT WRITTEN PERMISSION OF ROJONE PTY LTD.

DO NOT SCALE

SPECIFICATIONS
AMA-2255-3-716

Frequency Range: 800-2500MHz
 Input RF Power: 200W@VSWR<2:1
 I/O Return Loss: -20dB Typ
 Amp Balance: $\pm 0.5\text{dB}$
 IM3: -150dBc@43dBm $\times 2</math>
 -155dBc Typ
 Op Temperature: -40 to +65 °C
 Humidity: 100%
 Connector: Din 716 Female
 Weight: 1.4 Kg$



 ROJONE PTY LTD ACN 002691241 81 AERO RD INGLEBURN 2565 SYDNEY, AUSTRALIA Ph: (612) 9829 1555 Fax: (612) 9605 8812 Web: www.rojone.com.au E-mail: sales@rojone.com.au	TITLE INTERFACE DRAWING FOR DIN TYPE 3 WAY DIVIDER AMA-2255-3-716	
	DRWG No: 002003250030	
MATERIAL ALUMINIUM ALLOY 6061 BODY	DRAWN Y. GU CHECKED H. JIA APPROVED	SCALE 1:1 SHEET 1 OF 1 FILENAME 002003250030ISSB.DWG

UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES (mm) TOLERANCE: LINEAR ± 0.1 ANGULAR $\pm 1^\circ$ REMOVE ALL BURRS AND SHARP EDGES