


3rd ANGLE PROJECTION

THIS DOCUMENT AND THE DESIGN SHOWN THEREON IS THE PROPERTY OF ROJONE PTY LTD AND MUST NOT BE SOLD, LENT, GIVEN AWAY, COPIED, REPRODUCED OR OTHERWISE DIVULGED TO ANY THIRD PARTY OR USED FOR MANUFACTURE, OR ANY OTHER PURPOSE WITHOUT DIRECT WRITTEN PERMISSION OF ROJONE PTY LTD.

DO NOT SCALE

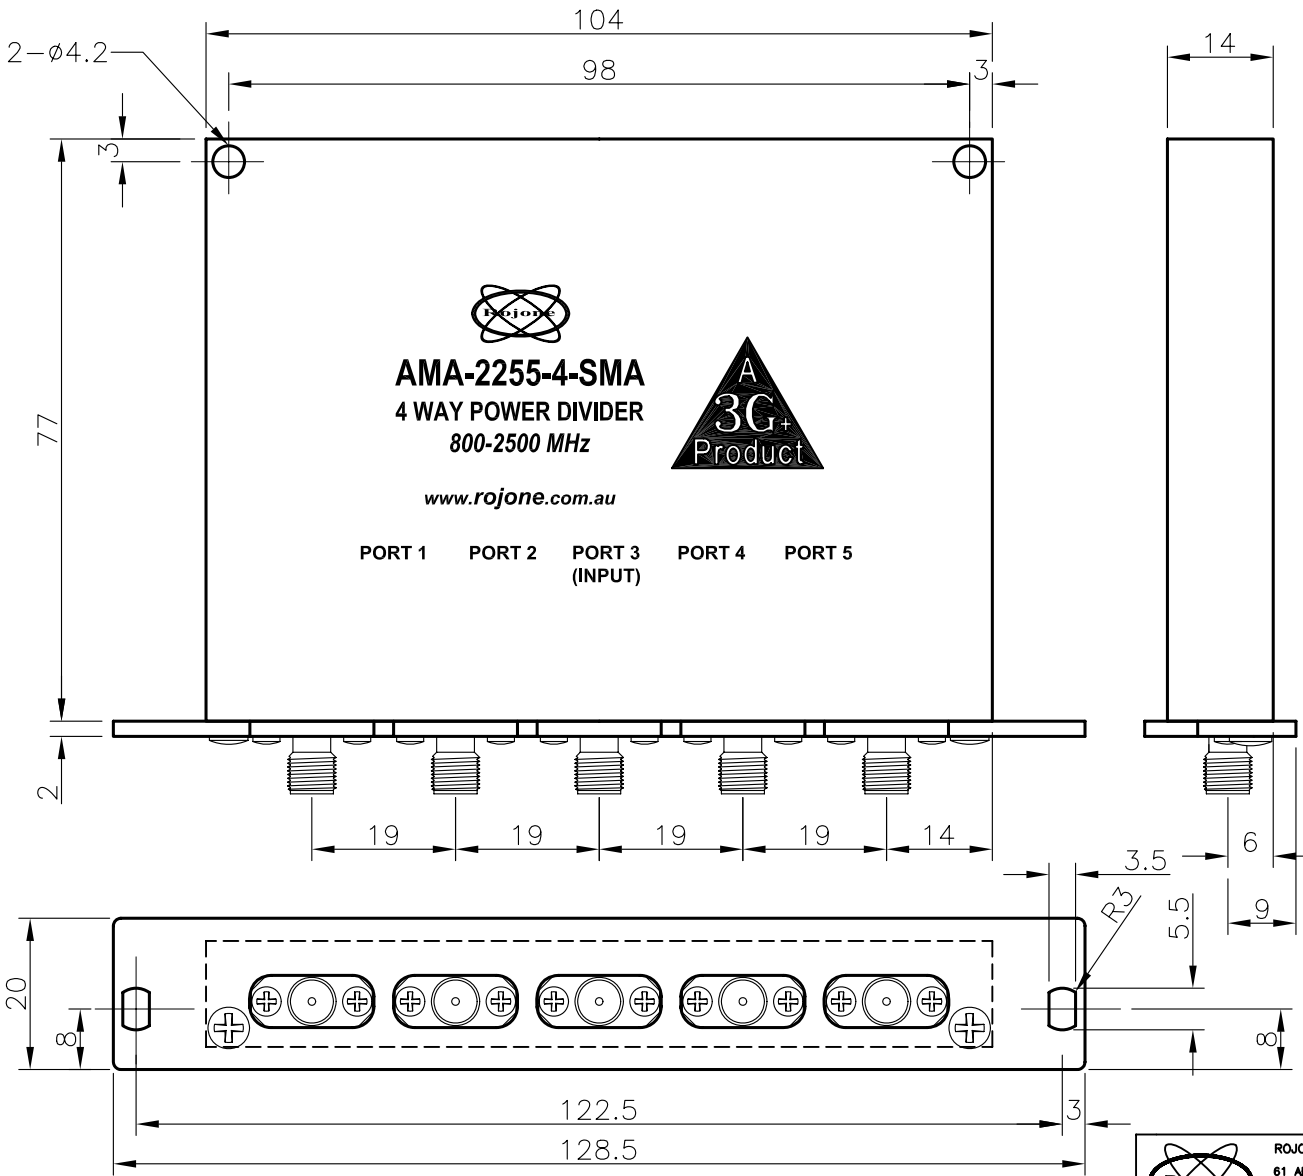

SPECIFICATION for AMA-2255-4-SMA	
Frequency:	800-2500MHz
Number of Ports:	4 Ports
Isolation:	20dB Min
Thru Loss:	7 dB Typ
Amplitude Balance:	< ±0.2 dB
Phase Balance:	< ±2 Degrees
Return Loss:	-20dB Typ
Max RF Power:	30 Watts CW
Max. Output Mismatch:	VSWR 5:1
Impedance:	50 Ohms
Connector Type:	SMA - FEMALE
Size:	104mm x 77mm x 14mm PLUS CONNECTORS

REVISION	DATE	CHECKED
A	27-08-2008	H. JIA
B	12-09-2008	H. JIA
C	12-09-2008	H. JIA
D	15-09-2008	H. JIA

ROJONE PTY LTD ACN 002691241
 61 AERO RD INGLEBURN 2560
 SYDNEY, AUSTRALIA
 Ph: (612) 9829 1555 Fax: (612) 9605 8812
 Web: www.rojone.com.au E-mail: sales@rojone.com.au

TITLE INTERFACE DRAWING FOR
 AMA-2255-4-SMA

DRWG No: 002004250107

MATERIAL AS PART

DRAWN Y. GU

FINISH AS PART

CHECKED H. JIA

APPROVED B. G.

SCALE 1:1 SHEET 1 OF 1

FILENAME 002004250107ISSD.DWG

A4

UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES (mm) TOLERANCE: LINEAR ±0.1 ANGULAR ±1° REMOVE ALL BURRS AND SHARP EDGES