
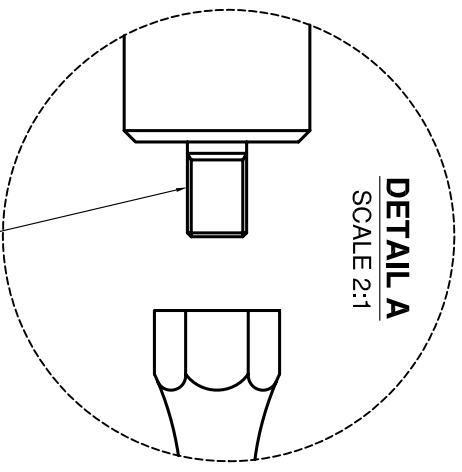


3rd ANGLE PROJECTION THIS DOCUMENT AND THE DESIGN SHOWN THEREON IS THE PROPERTY OF ROJONE PTY LTD AND MUST NOT BE SOLD, LENT, GIVEN AWAY, COPIED, REPRODUCED OR OTHERWISE DIVULGED TO ANY THIRD PARTY OR USED FOR MANUFACTURE. DO NOT SCALE OR ANY OTHER PURPOSE WITHOUT DIRECT WRITTEN PERMISSION OF ROJONE PTY LTD.

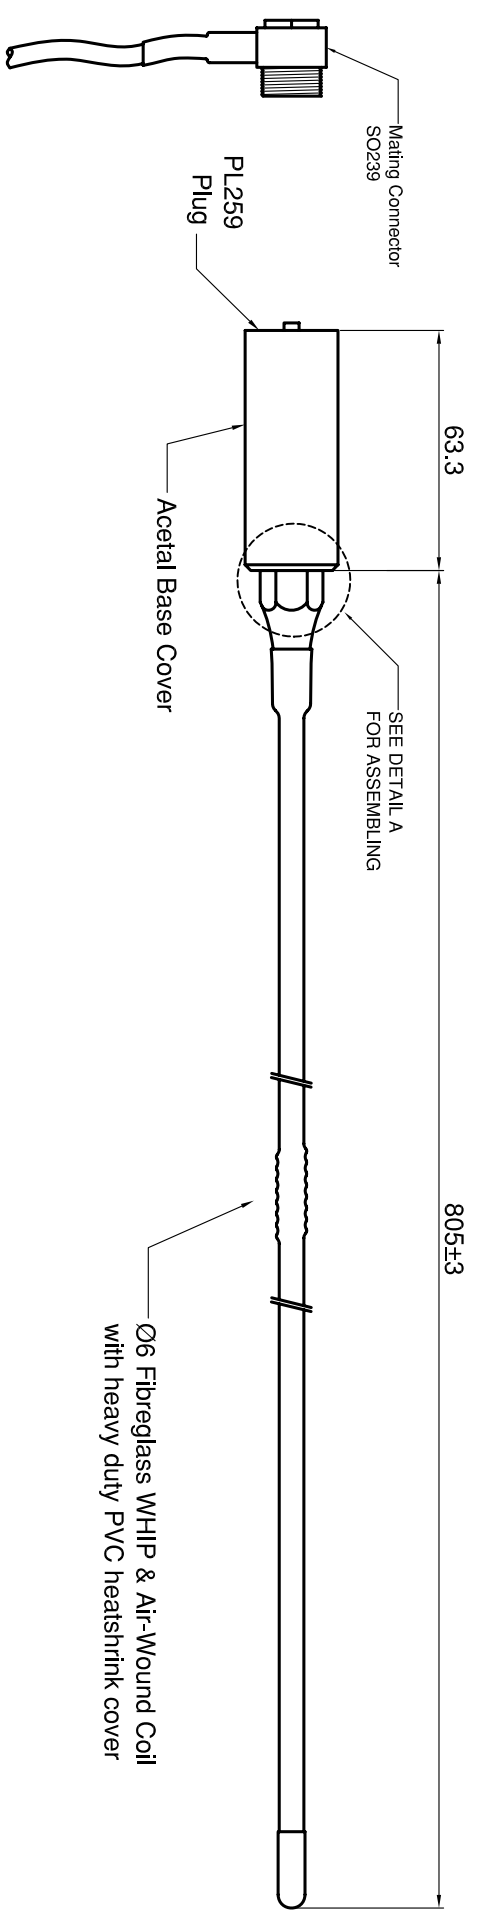

5/16" 26TPI THREAD
10 MIN LG THREAD

Ø6 Fibreglass WHIP & Air-Wound Coil
with heavy duty PVC heatshrink cover

SPEC for A-326-460

- Freq Range:** 450-470MHz
- Band Width:** 5 MHz
- Gain:** 5.5dB over Ground
- Style:** 5/8 over 5/8 Wave Style
- Impedance:** 50 Ohm
- VSWR:** <1.5:1 over 5 MHz
- Mounting:** PL 259
(using SO239 for mating Conn)

UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES (mm) TOLERANCE: LINEAR ±0.1 ANGULAR ±1° REMOVE ALL BURRS AND SHARP EDGES

		ROJONE PTY LTD ACN 002891241 44 AERO RD INGLEBURN 2965 SOUTH AUSTRALIA Ph: (012) 9829 1555 Fax: (012) 9805 8812 Web: www.rojone.com.au E-mail: sales@rojone.com.au		TITLE: INTERFACE DRAWING FOR UHF MOBILE GROUND INDEPENDENT ANTENNA A-326-460	
MATERIAL	N/A	DRAWN	Y. GU	DRWG No:	009001001316
FINISH	N/A	CHECKED	B. G.	SCALE	1:1
		APPROVED	B. G.	SHEET	1 OF 1
				FILENAME	009001001316SSA.DWG
					A2