

### SPECIFICATION for ROJ-074NMT-4-4-716


FREQ: 700-2700MHz  
 ISO: 20dB MIN. ADJACENT PORTS  
 30dB MIN NON-ADJACENT  
 RTN LOSS: <-18dB TYP.  
 THRU LOSS: 6.5dB ±0.7dB MAX. TO 2.7GHz  
 POWER: 100W PER PORT  
 IMPEDANCE: 50 Ohms  
 IM3: <= 150dBc@43dBm x 2  
 with Low IM Termination  
 CONNECTOR: DIN 716 FEMALE  
 WEIGHT: ALUMINUM 3.5KG Approx.

### Coupling Ports Spec

Coupling: -35 ± 1.5 dB

### Note:

Monitored N ports are supplied terminated with low power loads R404131-750.

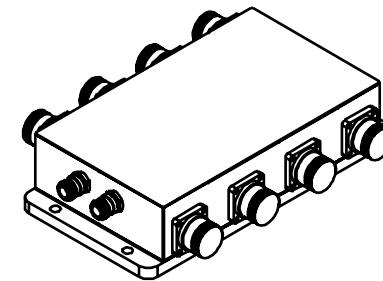

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY.	REVISED	DATE	BY	APP'D	SCALE	00=01 SCALE DRAWING	REVISION
DATE	BY	DATE	BY	APP'D	SCALE	www.rjone.com.au	
DATE	BY	DATE	BY	APP'D	SCALE	INTERFACE DRAWING FOR	
DATE	BY	DATE	BY	APP'D	SCALE	ROJ-074-4-4-716	
DATE	BY	DATE	BY	APP'D	SCALE	001002250174issa	A1
DATE	BY	DATE	BY	APP'D	SCALE		
DATE	BY	DATE	BY	APP'D	SCALE		
DATE	BY	DATE	BY	APP'D	SCALE		
DATE	BY	DATE	BY	APP'D	SCALE		
DATE	BY	DATE	BY	APP'D	SCALE		