




**DRAWING**

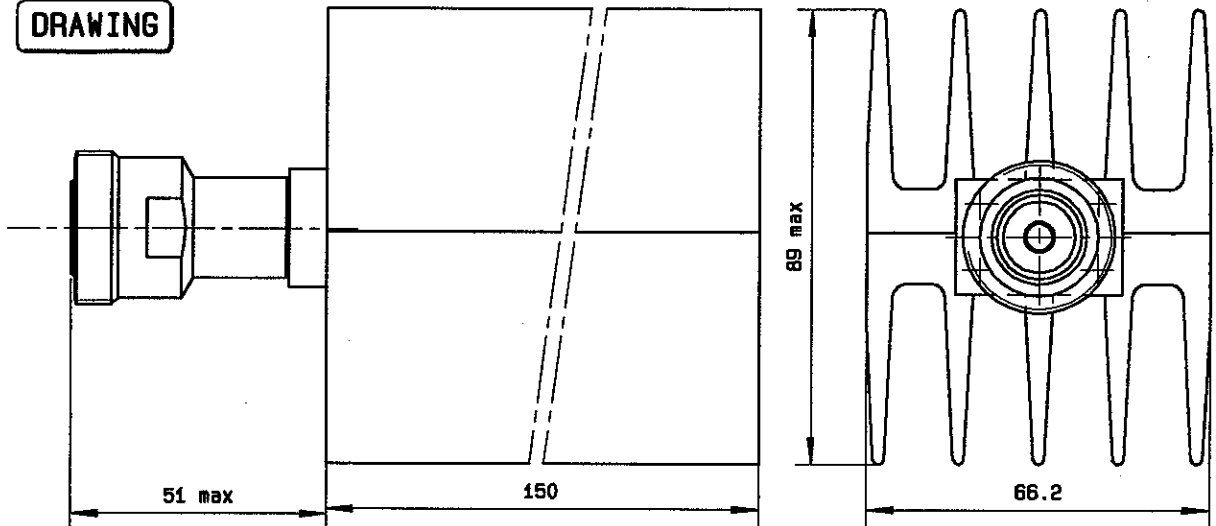

**R F CHARACTERISTICS**

General tolerances: +/- 0.5 mm

FREQUENCY RANGE : DC - 2 GHz  
 IMPEDANCE : 50 Ohms  
 DC RESISTANCE : 50 Ohms ± 5 %  
 V.S.W.R : DC - 1 GHz : ≤ 1.10  
           1 - 2 GHz : ≤ 1.20  
 PEAK POWER at 25°C (1µs, 1%) : 5 kW  
 AVERAGE POWER at 25°C : 100 W


**MECHANICAL CHARACTERISTICS**

CONNECTORS : 7/16female per IEC 169-4  
 WEIGHT : < 1045 g

**ENVIRONMENTAL CHARACTERISTICS**

OPERATING TEMPERATURE RANGE (°C) : -40 , +85  
 STORAGE TEMPERATURE RANGE (°C) : -40 , +85

Power derating  
Versus temperature

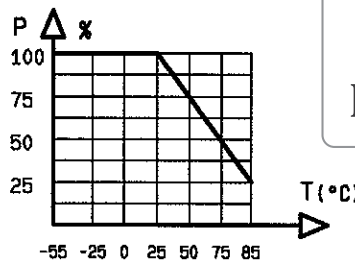

Australian Representatives  
**ROJONE, PTY LTD.**  
 Tel: 02 9829 1555  
 E: sales@rojone.com.au  
 www.rojone.com.au

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

4112-9212

CREATION N° : PEN/EP:H92016 Name:MG Date:05.apr.96 APP.:AF					
ISSUE	REVISIONS	NAME	APPR.		

**RADIALL®**  
 101. rue P. Hoffmann -Z.I Ouest-  
 93116 ROSNY/BOIS Cedex-FRANCE  
 Phone :33(1)49353535  
 Fax :33(1)48546363  
 Tvx RADIA 235220F