


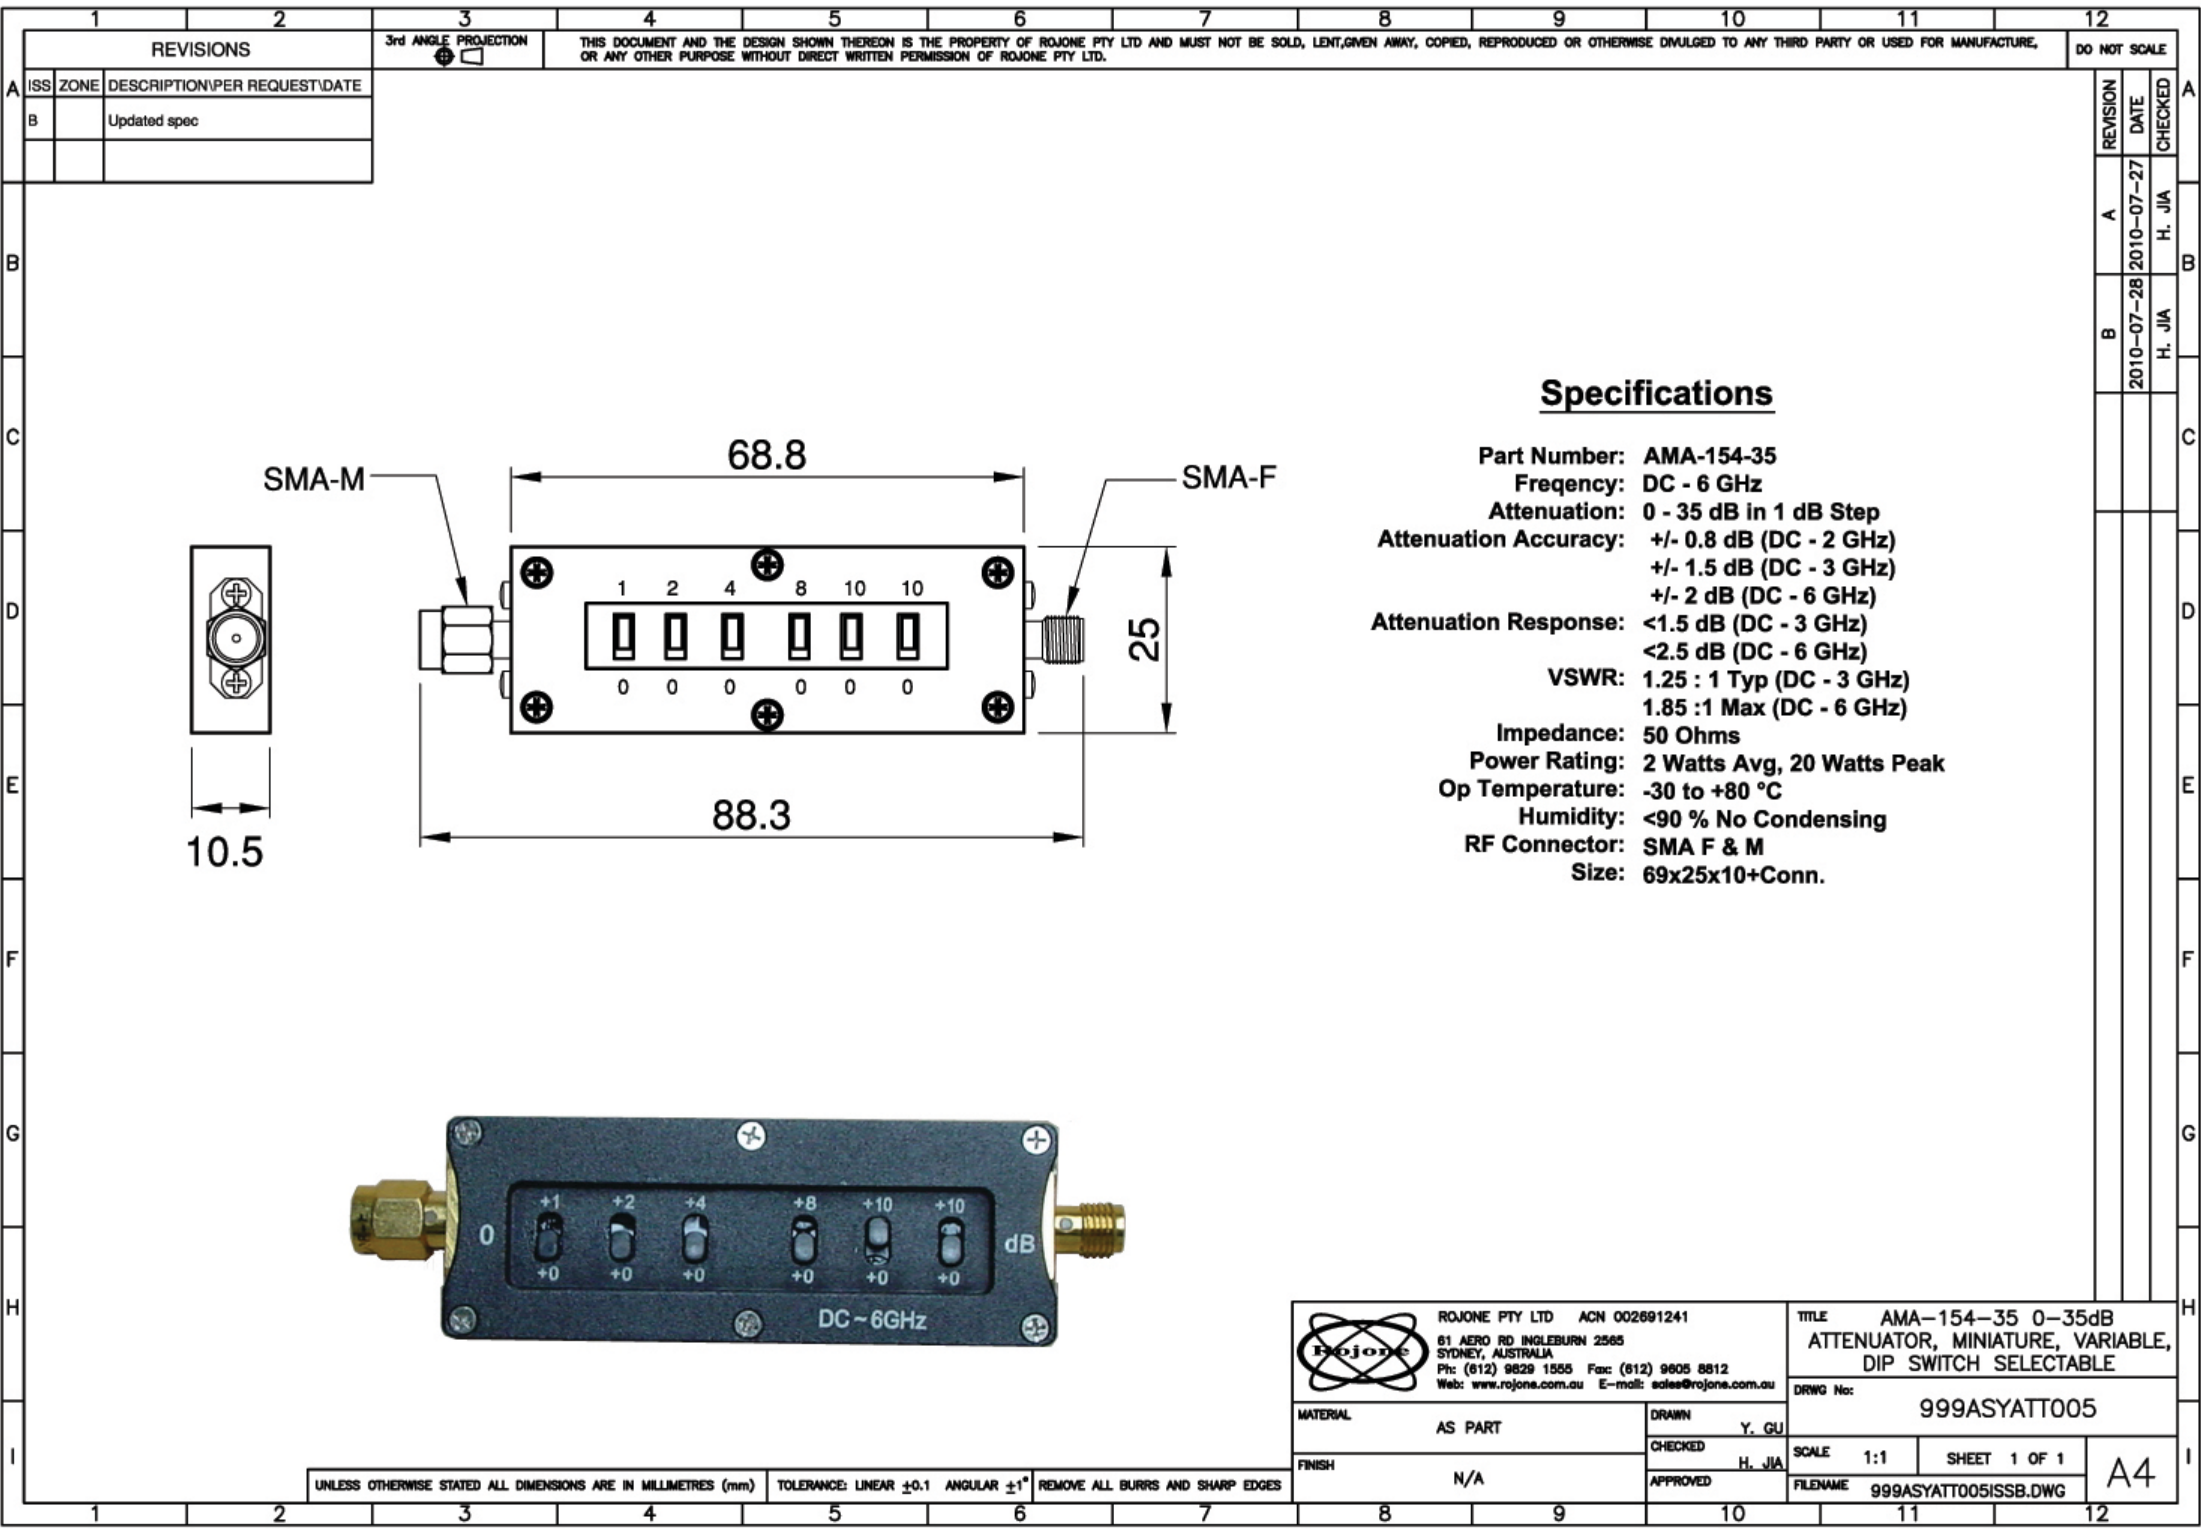

REVISIONS			
ISS	ZONE	DESCRIPTION/PER REQUEST/DATE	
B		Updated spec	

3rd ANGLE PROJECTION

THIS DOCUMENT AND THE DESIGN SHOWN THEREON IS THE PROPERTY OF ROJONE PTY LTD AND MUST NOT BE SOLD, LENT, GIVEN AWAY, COPIED, REPRODUCED OR OTHERWISE DIVULGED TO ANY THIRD PARTY OR USED FOR MANUFACTURE, OR ANY OTHER PURPOSE WITHOUT DIRECT WRITTEN PERMISSION OF ROJONE PTY LTD.

DO NOT SCALE

REVISION	DATE	CHECKED
A	2010-07-27	H. JIA
B	2010-07-28	H. JIA

Specifications

Part Number: AMA-154-35
Frequency: DC - 6 GHz
Attenuation: 0 - 35 dB in 1 dB Step
Attenuation Accuracy: +/- 0.8 dB (DC - 2 GHz)
 +/- 1.5 dB (DC - 3 GHz)
 +/- 2 dB (DC - 6 GHz)
Attenuation Response: <1.5 dB (DC - 3 GHz)
 <2.5 dB (DC - 6 GHz)
VSWR: 1.25 : 1 Typ (DC - 3 GHz)
 1.85 :1 Max (DC - 6 GHz)
Impedance: 50 Ohms
Power Rating: 2 Watts Avg, 20 Watts Peak
Op Temperature: -30 to +80 °C
Humidity: <90 % No Condensing
RF Connector: SMA F & M
Size: 69x25x10+Conn.

 ROJONE PTY LTD ACN 002691241 61 AERO RD INGLEBURN 2585 SYDNEY, AUSTRALIA Ph: (612) 9829 1555 Fax: (612) 9805 8812 Web: www.rojone.com.au E-mail: sales@rojone.com.au				TITLE AMA-154-35 0-35dB ATTENUATOR, MINIATURE, VARIABLE, DIP SWITCH SELECTABLE			
MATERIAL AS PART				DRAWN Y. GU			
FINISH N/A				CHECKED H. JIA			
				APPROVED			
				SCALE 1:1		SHEET 1 OF 1	
				FILENAME 999ASYATT005ISSB.DWG		A4	

UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES (mm) TOLERANCE: LINEAR ±0.1 ANGULAR ±1° REMOVE ALL BURRS AND SHARP EDGES