




REVISIONS

ISS	ZONE	DESCRIPTION (PER REQUEST)	DATE
B		Modified p/n and spec Released by LjMa 20140318	

3rd ANGLE PROJECTION

THIS DOCUMENT AND THE DESIGN SHOWN THEREON IS THE PROPERTY OF ROJONE PTY LTD AND MUST NOT BE SOLD, LENT, GIVEN AWAY, COPIED, REPRODUCED OR OTHERWISE DIVULGED TO ANY THIRD PARTY OR USED FOR MANUFACTURE, OR ANY OTHER PURPOSE WITHOUT DIRECT WRITTEN PERMISSION OF ROJONE PTY LTD.

DO NOT SCALE

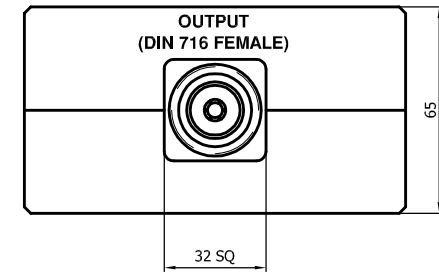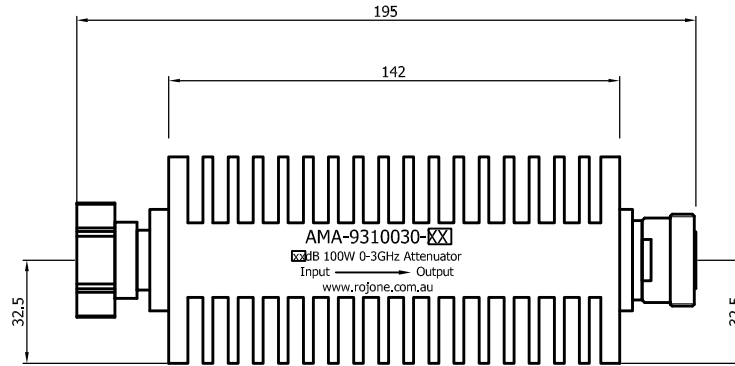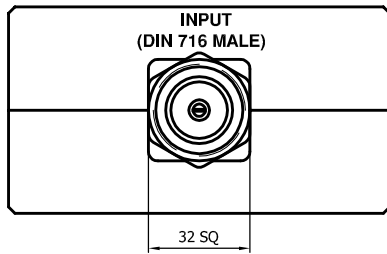

**Rojone P/N Ordering Detail**

**AMA-9 3 100 30-XX**


XX	ATTENUATION
03	3dB
06	6dB
10	10dB
20	20dB
30	30dB

Din716 Male to Din716 Female

100 W

DC to 3 GHz

Attenuator Series

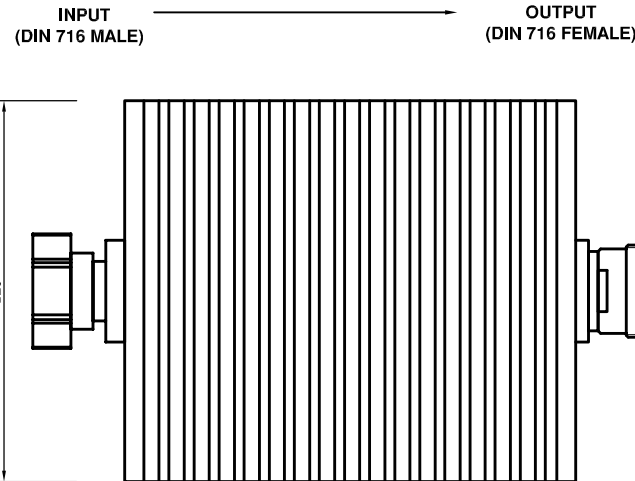

**SPECIFICATIONS  
AMA-9310030-XX**

- FREQ: DC TO 3GHz
- VSWR: < 1.15 ( DC TO 1.0 GHz )  
< 1.35 ( 1.0 TO 3.0 GHz )
- ATTENUATION: 3,6,10,20,30 dB (See Rojone P/N)
- ATTEN ACCUR: ±0.3dB OR 3%W.I.G. Typ
- INPUT POWER: 100 W CW @ 20 °C
- PEAK PWR: 10 KW MAX (10 us)
- OP TEMP: -20 to +50 °C
- WEIGHT: 2 Kg
- CONN: DIN 716 MALE for INPUT  
DIN 716 FEMALE for OUTPUT

UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES (mm) TOLERANCE: LINEAR +0.1 ANGULAR +1° REMOVE ALL BURRS AND SHARP EDGES

	ROJONE PTY LTD ACN 002691241 44 AERO RD INGLEBURN 2565 SYDNEY, AUSTRALIA		TITLE INTERFACE FOR AMA-9310030-XX XXdB 100W 0-3GHz DIN ATTENUATOR	
	Ph: (612) 9829 1555 Fax: (612) 9605 8812 Web: www.rojone.com.au E-mail: sales@rojone.com.au		DRWG No: 003001001201	
MATERIAL	DRAWN	Y. GU	SCALE	NTS
FINISH	CHECKED	H. JIA	SHEET	1 OF 1
	APPROVED	L. B.	FILENAME	003001001201SSB.DWG

A4