


REV	ZONE	DESCRIPTION	PER REQUEST	DATE
a		Issd	absolute n superseded by issc	
c		Del name - "Incr n "Incr last addup"		
d		Issc obsolete n superseded by issd		

3rd ANGLE PROJECTION
 THE DOCUMENT AND THE DESIGN SHOWN THEREON IS THE PROPERTY OF ROJONE PTY LTD AND MUST NOT BE SOLD, LENT, GIVEN AWAY, COPIED, REPRODUCED OR OTHERWISE DIVULGED TO ANY THIRD PARTY OR USED FOR MANUFACTURE, OR ANY OTHER PURPOSE WITHOUT WRITTEN PERMISSION OF ROJONE PTY LTD.



Part Number: ROJ-LD211-01L
Description: 7/16 Male Low PIM 5W Load

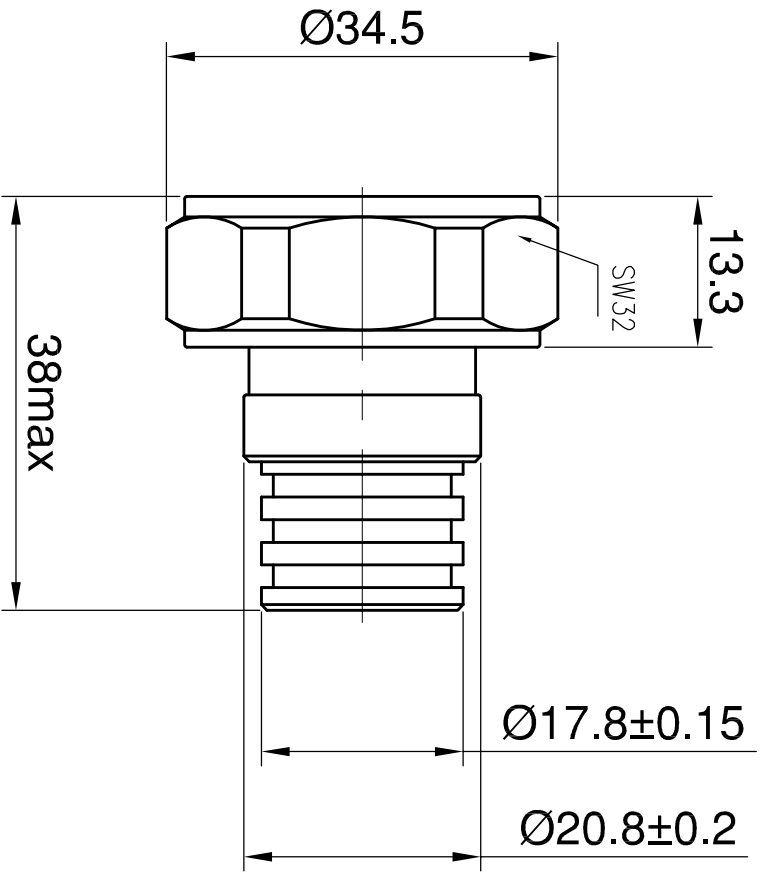

SPECIFICATION

- Frequency: DC - 4 GHz
- Input RF Power: 5 Watts
- VSWR: <1.2:1@0-4GHz
- Operating Temp: -30 to +50 °C
- Connector Type: 7/16 Din Male
- Centre Pin: Silver Plated
- Connector Finish: Low PIM Plated
- Weight: 89 grams

UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES (mm) TOLERANCE: LINEAR ± 0.1 ANGULAR $\pm 1^\circ$ REMOVE ALL BURRS AND SHARP EDGES

<p>ROJONE PTY LTD AON 002691241 44 AERO RD INGLEBURN 2565 STONEY, AUSTRALIA Ph: (612) 9829 1555 Fax: (612) 9829 8812 Web: www.rojone.com.au Email: sales@rojone.com.au</p>		<p>TITLE 7/16 MALE LOW PIM 5W LOAD PART NUMBER ROJ-LD211-01L DRWG No: 100001001023</p>	
MATERIAL	see note	DRAWN	Y. GU
FINISH	see note	CHECKED	L. B.
APPROVED		SCALE	NTS
		FILENAME	100001001023ISSD.DWG
		SHEET	1 OF 1
			A4

REVISION	DATE	CHECKED
A	11-12-2007	H. JIA
B	17-01-2008	H. JIA
C	20140911	H. JIA
D	20140917	L. B.