


## Product Data

Part Number RO-NF-M  
Description N In-Series Male to Female Low PIM Adaptor

Specifications  
 Frequency DC to 6 GHz optimized  
 Impedance 50 Ohms  
 VSWR < 1.25:1  
 Intermodulation >150 dBc (2x43dBm)  
 Mating Life Min 100 cycles  
 Operating Temp -55 to +125 Degrees C  
 Body Brass, Silver CuSnZn3  
 Weight 35 Grams

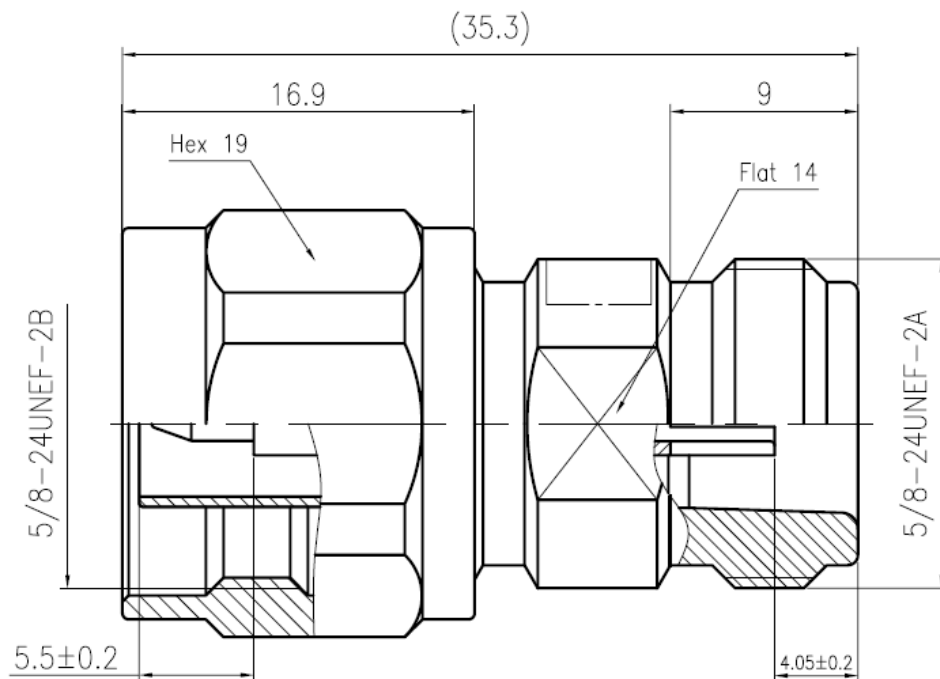

Proudly one of Australia's top 100 Professional & Military Electronics, GPS, RF & Telecommunications companies