

REVISIONS	DESCRIPTION	PER REQUEST	DATE
A	First Issue		


3rd ANGLE PROJECTION

THIS DOCUMENT AND THE DESIGN SHOWN THEREON IS THE PROPERTY OF ROJONE PTY LTD AND MUST NOT BE SOLD, LENT, GIVEN AWAY, COPIED, REPRODUCED OR OTHERWISE DIVULGED TO ANY THIRD PARTY OR USED FOR MANUFACTURE, OR ANY OTHER PURPOSE WITHOUT WRITTEN PERMISSION OF ROJONE PTY LTD.

DO NOT SCALE

Part Number: ROJ-A314-251-101
Description: L1-L2 Cavity Filter 100W N-F

A	REVISION
20140917	DATE
L. B.	CHECKED

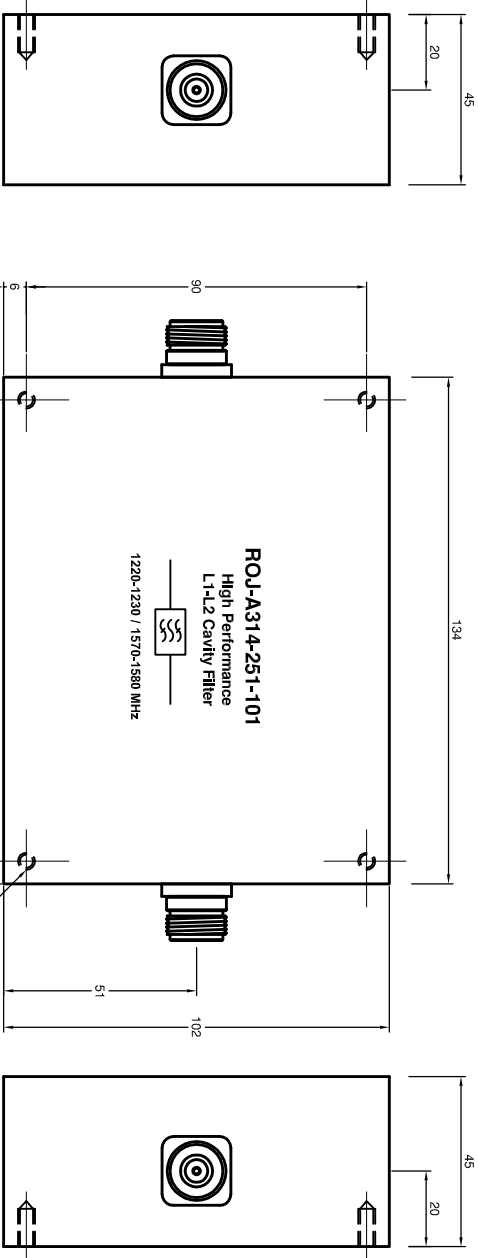

Specification

Frequency: 1220-1230 MHz 1220-1230 MHz
VSWR: 1.20 1.2
Insertion Loss: <= 1.0 <= 1.0
Rejection (dB): >50 dB@1180 MHz >=50 dB @1610 MHz

Connectors: N-F 50 Ohm
Power: 100 W
Impedance: 50 Ohm

UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES (mm) TOLERANCE: LINEAR ± 0.1 ANGULAR $\pm 1^\circ$ REMOVE ALL BURRS AND SHARP EDGES

		ROJONE PTY LTD ACN 002691241 44 AERO RD INGLEBURN 2565 STONEY, AUSTRALIA Ph: (612) 9829 1555 Fax: (612) 9605 8812 Web: www.rojone.com.au Email: sales@rojone.com.au	
MATERIAL	ALUMINIUM BODY	DRAWN	Y. GU
FINISH	PAINT	CHECKED	L. B.
		APPROVED	L. B.
		SCALE	1:1
		SHEET	1 OF 1
		FILENAME	004001001094ISSA.DWG
		DWG No:	004001001094
		TITLE	L1-L2 GPS CAVITY FILTER
			ROJ-A341-251-101

